



# Pneumatic gear driven agitators

**Ex-proof according to ATEX 94/9/EG**

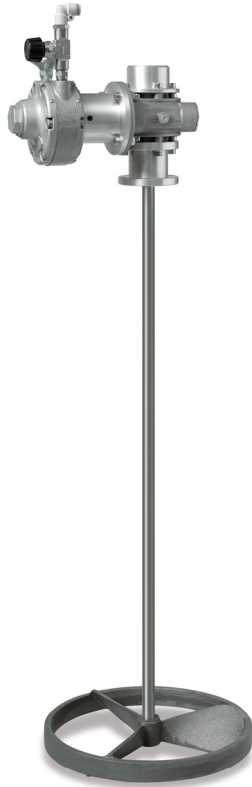

- Ideal for use in explosive areas
- Suitable to disperse nearly all fluid media
- Agitator wings made of hard coated aluminium or stainless steel available in various diameters.
- Standard-wave length 1000 mm. Other lengths are individually possible
- For 200 Ltr. drums, plastic container and 25 kg Hobbok.

## Technical data:

Max. allowed air input pressure:	0,6. MPa
Speed:	0- 100 min <sup>-1</sup>
Connections:	G1/4
Weight:	12 kg
Wet parts:	stainless steell/HC
Ambient temperature:	-20°C bis +40°C
Temperature category:	T4
Cluster:	II
Categorie:	2G
Marking:	 II 2G cT4

Recommended accessory: pneumatic oiler Nr. 64115000  
Recommended adjustment: 1 drop at air flow of approx.  
1500 - 2000 Liter

